



■Features:

- ✧ 30-150 Watts;
- ✧ E26/E27/E39/E40 lamp base;
- ✧ Warm / Natural / Cool / Cold white;
- ✧ 360degree beam angle, high CRI>80Ra, PF>0.9;
- ✧ Big heat sink, double SUNON fans;
- ✧ Clear or frosted cover;
- ✧ Internal Isolated driver with Rubycon capacitor, input voltage AC100-277V;
- ✧ No UV or IR in the beam;
- ✧ Energy saving, long life-span 50000 Hrs;
- ✧ Light is soft and uniform, safe to eyes;
- ✧ Instant start, NO flickering, NO humming;
- ✧ Green and eco-friendly without mercury.

■Specifications:

Model No.	TP-CL30W-C	TP-CL40W-C	TP-CL60W-C	TP-CL80W-C
Input Voltage	100-277VAC, 47-63Hz			
Power	30W	40W	60W	80W
LED Chips	Epistar SMD2835			
Lumen efficiency	130 lm/w±5%			
CCT	2700K-6500K			
CRI	80			
Beam Angle	360°			
Lifespan	>30000 H			
Dimension	Φ93*231mm	Φ93*263mm	Φ93*287mm	Φ125*269mm
Operating Environment	Temp:-25℃~50℃; Humidity:≤95%			
Single G.W.	0.67kg	0.92kg	0.88kg	1.4kg
Application	Supermarket, warehouse, garage, home, office, hotel, hospital, school, street, garden etc			


Shenzhen Toplight Lighting Technology Co.,LTD

Add:2F,2nd Building Tangzheng Technology Park,No.152 Guanlan Avenue,Longhua district,Shenzhen,China

Website:<http://www.toplightled.com> Tel:(86)0755-28151759/28151799 E-mail:info@toplightled.com

Model No.	TP-CL100W-C	TP-CL120W-C	TP-CL150W-C
Input Voltage	100-277VAC, 47-63Hz		
Power	100W	120W	150W
LED Chips	Epistar SMD2835		
Lumen efficiency	130 lm/w±5%		
CCT	2700K-6500K		
CRI	80		
Beam Angle	360°		
Lifespan	>30000 H		
Dimension	Φ125*288mm	Φ125*305mm	Φ125*335mm
Operating Environment	Temp:-25℃~50℃; Humidity:≤95%		
Single G.W.	1.6kg	1.8kg	2.0kg
Application	Supermarket, warehouse, garage, home, office, hotel, hospital, school, street, garden etc		


■Light Distribution (150W as example):

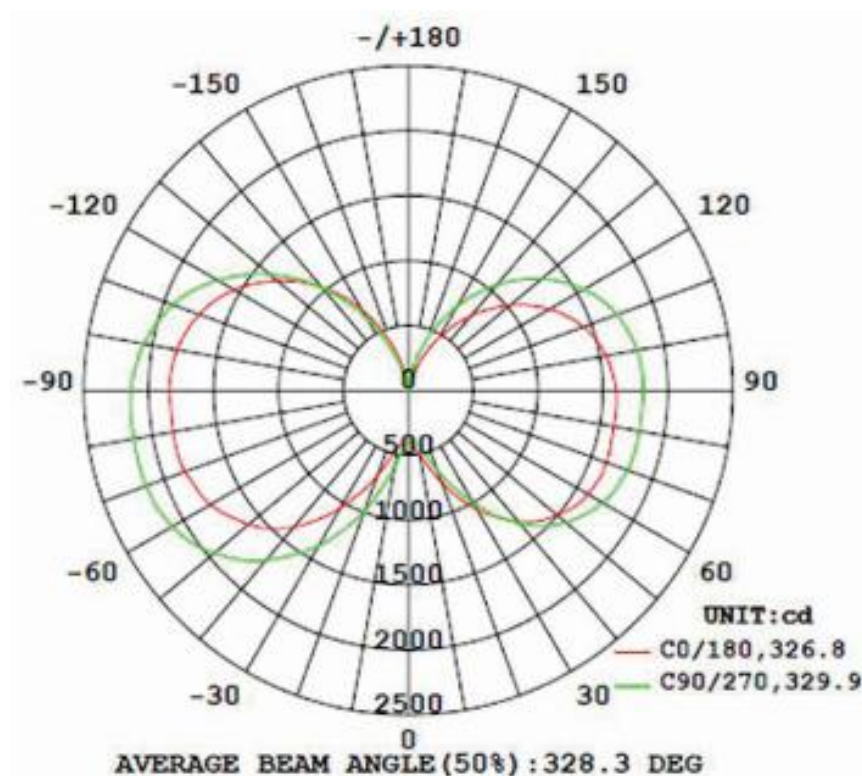

Shenzhen Toplight Lighting Technology Co.,LTD

Add:2F,2nd Building Tangzheng Technology Park,No.152 Guanlan Avenue,Longhua district,Shenzhen,China

Website:<http://www.toplightled.com> Tel:(86)0755-28151759/28151799 E-mail:info@toplightled.com

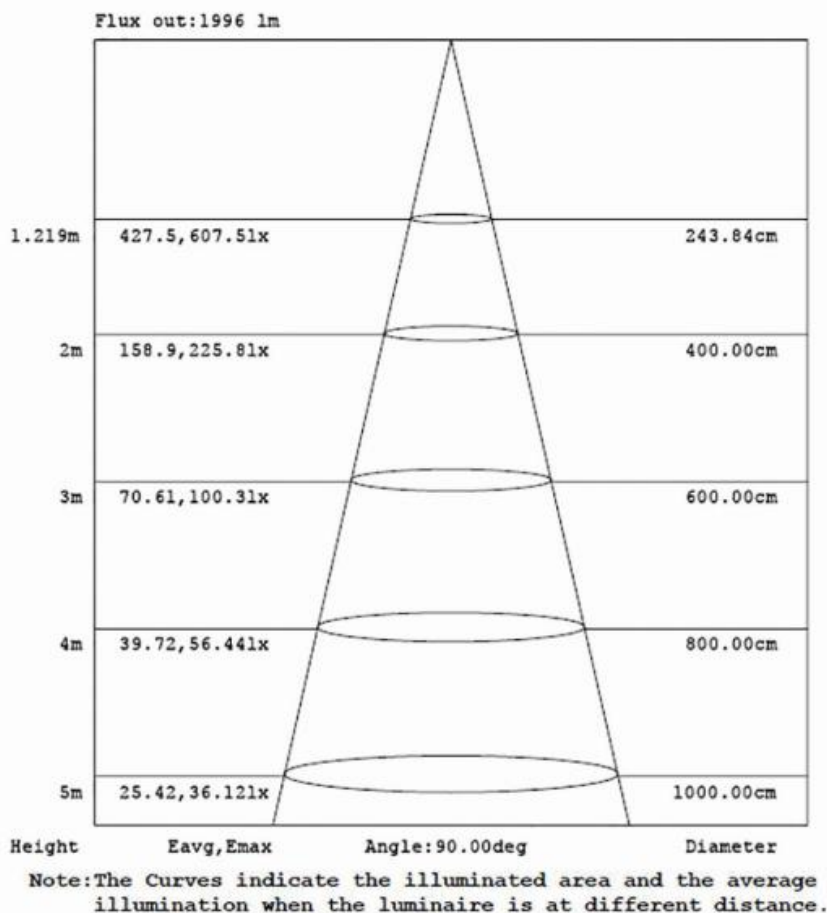


■ Dimensions

✧ 30W:

E26/E27

E39/E40

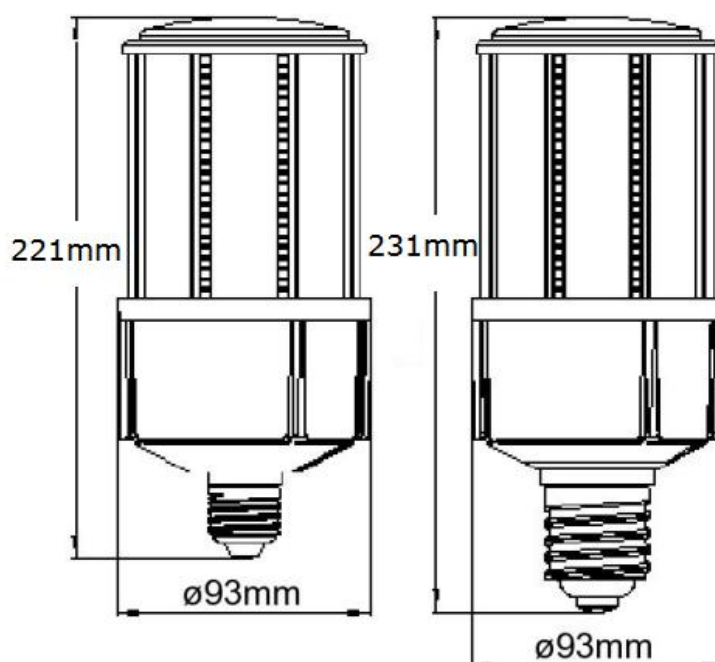

Shenzhen Toplight Lighting Technology Co.,LTD


Add:2F,2nd Building Tangzheng Technology Park,No.152 Guanlan Avenue,Longhua district,Shenzhen,China

Website:<http://www.toplightled.com> Tel:(86)0755-28151759/28151799 E-mail:info@toplightled.com

✧ 40W:

E26/E27


E39/E40

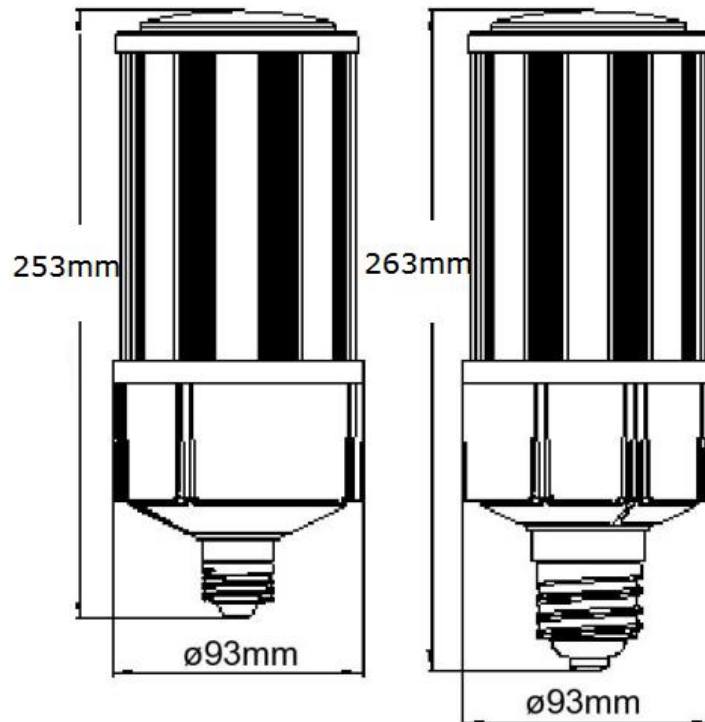

✧ 60W:

E26/E27

E39/E40

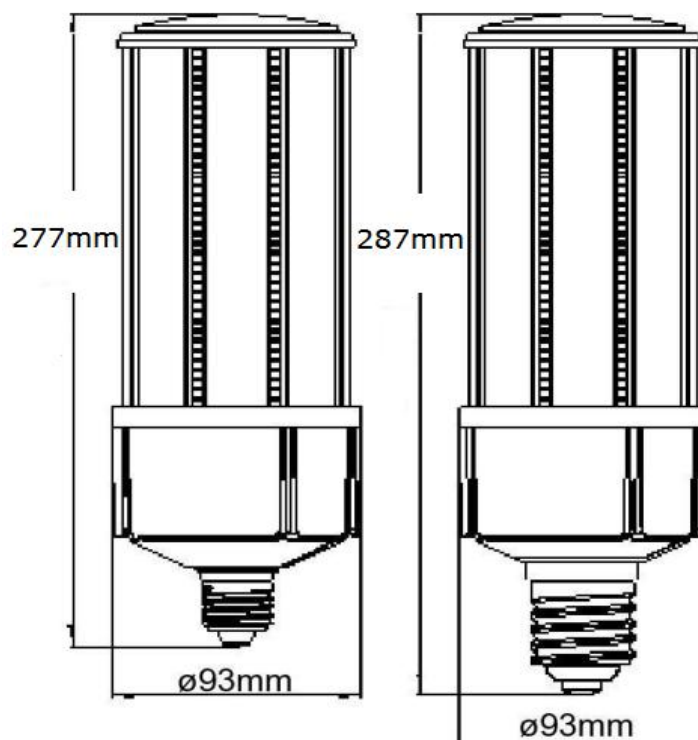

Shenzhen Toplight Lighting Technology Co.,LTD


Add:2F,2nd Building Tangzheng Technology Park,No.152 Guanlan Avenue,Longhua district,Shenzhen,China

Website:<http://www.toplightled.com> Tel:(86)0755-28151759/28151799 E-mail:info@toplightled.com

✧ 80W:

E26/E27


E39/E40

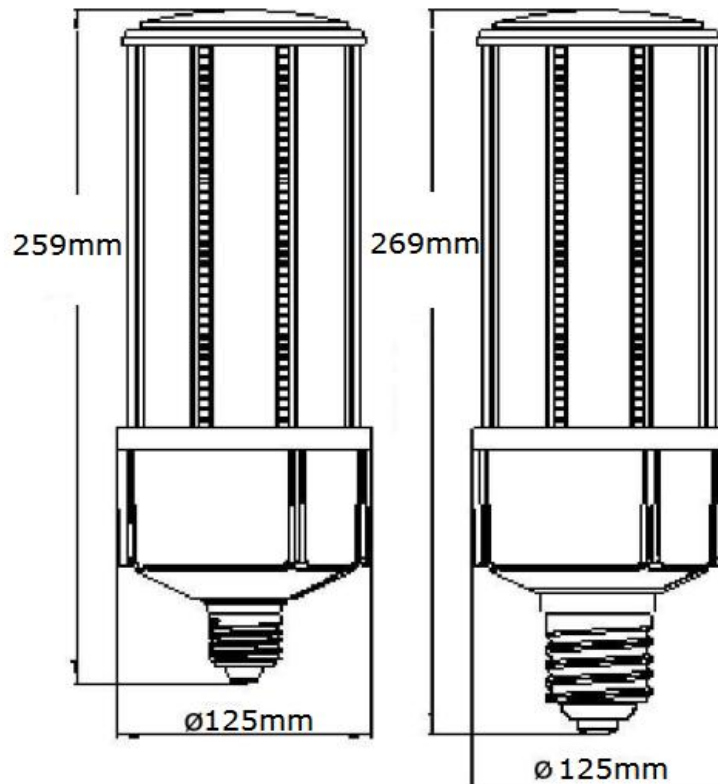

✧ 100W:

E26/E27

E39/E40

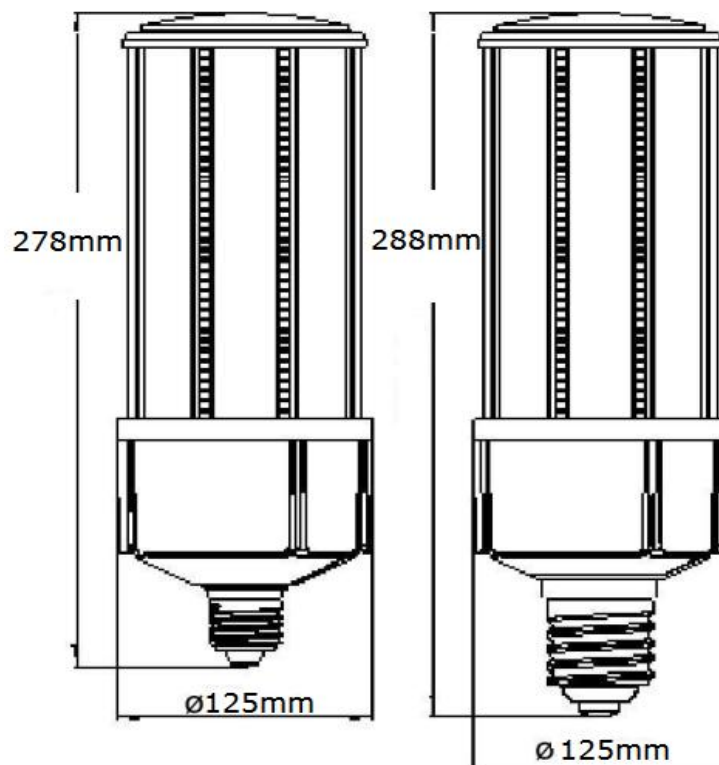

Shenzhen Toplight Lighting Technology Co.,LTD


Add:2F,2nd Building Tangzheng Technology Park,No.152 Guanlan Avenue,Longhua district,Shenzhen,China

Website:<http://www.toplightled.com> Tel:(86)0755-28151759/28151799 E-mail:info@toplightled.com

✧ 120W:

E26/E27


E39/E40

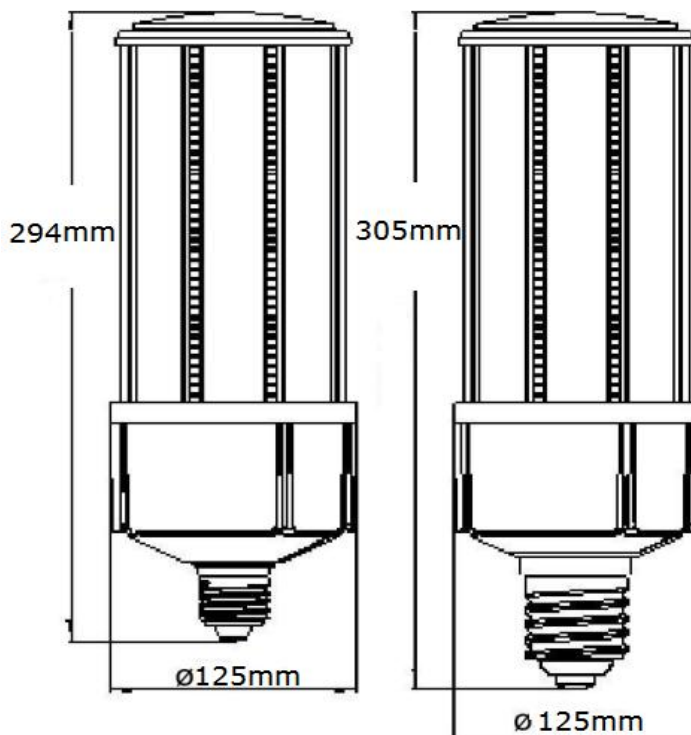

✧ 150W:


E26/E27

E39/E40

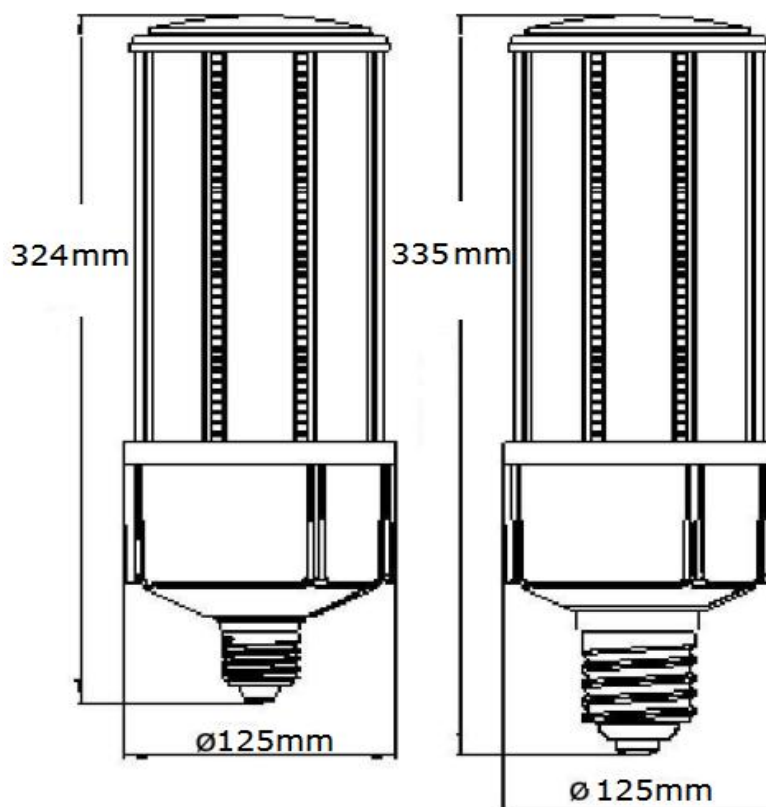

■ Installation:

- ✧ Please turn off power before install or change assembly parts.
- ✧ The input voltage and lamps should be matched, after connecting the power line, please make sure the wiring section is insulated.
- ✧ Make sure to remove or bypass the ballast in the fixtures before install the lamps.
- ✧ Suitable for damp locations. Do not use with dimmers.
- ✧ Suitable for use in enclosed luminaires.
- ✧ Opening power switch, and conducting power-on test.
- ✧ No-professionals, must not install and disassemble the lamps.

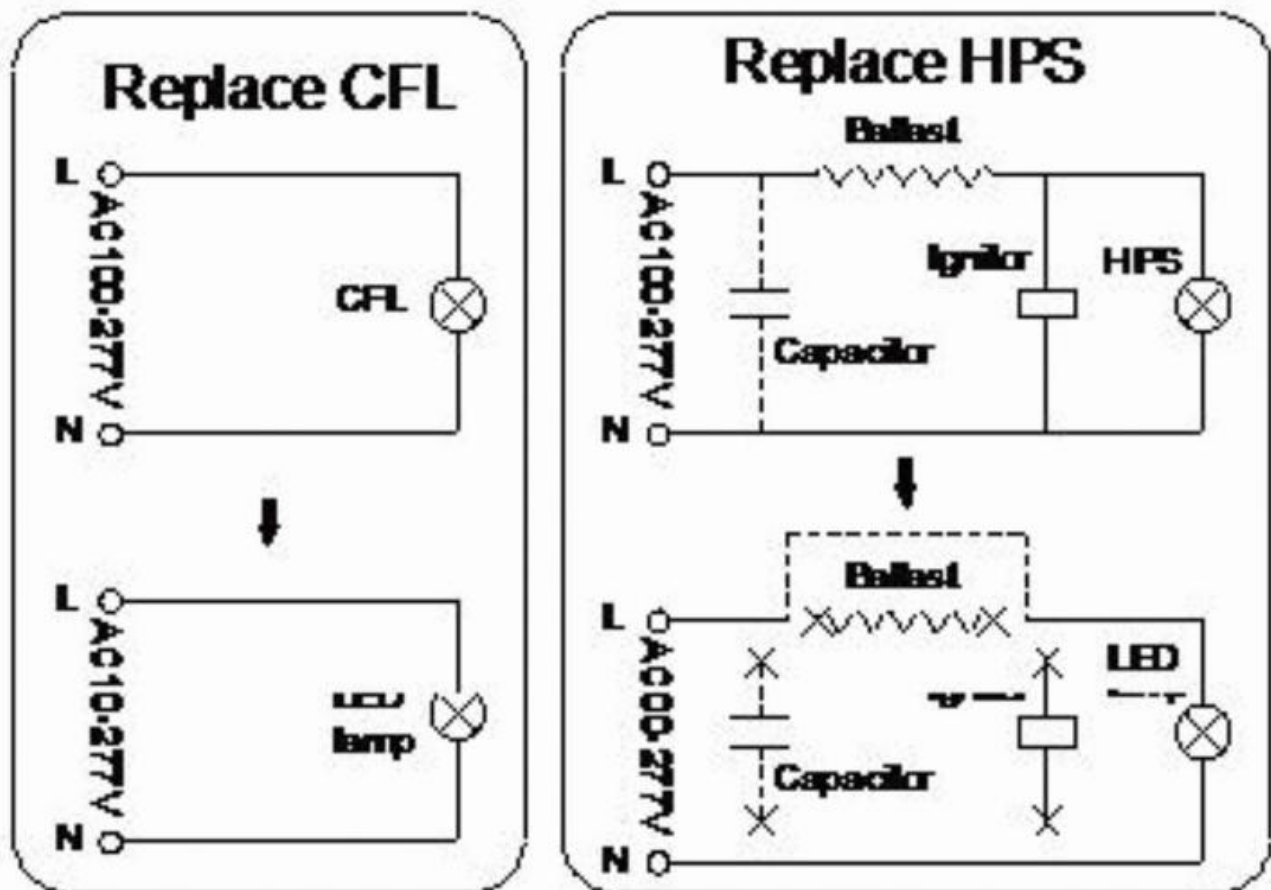

Precautions:

- ✧ Supporting wall or ceiling fixtures should have sufficient strength.
- ✧ Need to install the mounting bracket securely.
- ✧ Lighting installation wiring is completed and then power test, beware of electric shock.
- ✧ Do not attempt to open the lamp, changing the electrical structure, to prevent damage to the lamp, the resulting loss is not in the scope of the warranty.

Lamps can not be normal light emitting Troubleshooting:

- ✧ Lamp is not bright, check if mains wiring is connected after turn off power
- ✧ If wiring connection is correct, contact the dealer or service center with no appearance damage

After-sales service and maintenance:

- ✧ If any problem, please contact the dealer or service center in any case
- ✧ The product free repair within the warranty period, suitable materials fee charged after the warranty expires.
- ✧ If you have any questions please contact our company by the following way:
Hotline: +86 (0) 755-28151799 E-mail: info@toplightled.com

Packing:

8pcs/carton

